


## SAFE WORKING LOADS - HYDRAULIC OPERATION

LOADED CONCENTRICALLY AND 1° MAX OUT OF PLUMB

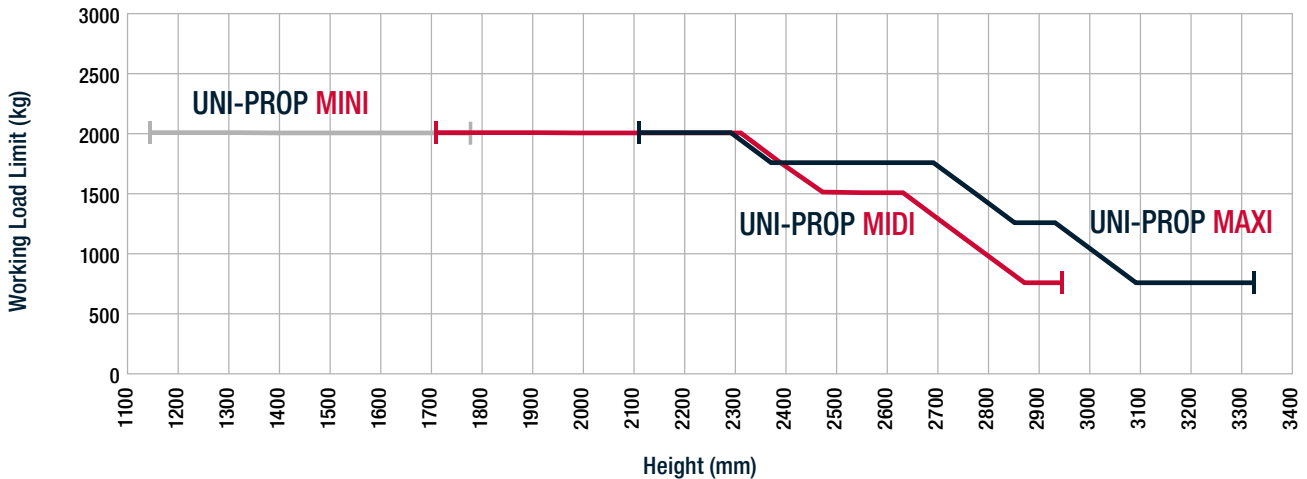


### NEVER EXCEED SAFE WORKING LOADS

- i) Safe Working Loads have been derived from load testing to BS EN 1065.
- ii) Mechanical Safe Working Loads are calculated to a minimum Factor of Safety of 2 to 1 on test results.
- iii) Convert kg to kN: 10kg = 0.09807kN. e.g. 100kg = 0.9807kN, 1000kg = 9.807kN, 5000kg = 49.04kN.

## SAFE WORKING LOADS - MECHANICAL OPERATION

LOADED CONCENTRICALLY AND 1° MAX OUT OF PLUMB

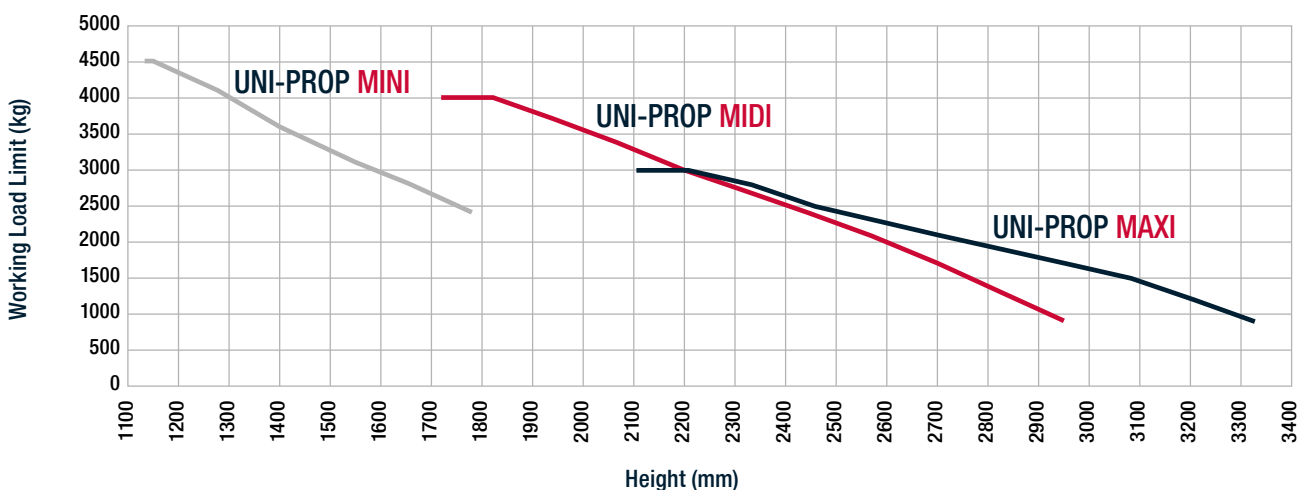

### NEVER EXCEED SAFE WORKING LOADS

- i) Safe Working Loads have been derived from load testing to BS EN 1065.
- ii) Hydraulic Safe Working Loads are calculated to a minimum Factor of Safety of 2.5 to 1 on test results.
- iii) Convert kg to kN: 10kg = 0.09807kN. e.g. 100kg = 0.9807kN, 1000kg = 9.807kN, 5000kg = 49.04kN.

For more information visit [uni-prop.com](http://uni-prop.com) or contact Uni-Prop on **0800 2545 456** or [support@uni-prop.com](mailto:support@uni-prop.com)